



## MK Series


Pan / Tilt Audio Video Entry  
Security System



**Black & White  
Video Entry Intercom**

# MK Pan / Tilt Audio Video Entry

## System Configuration

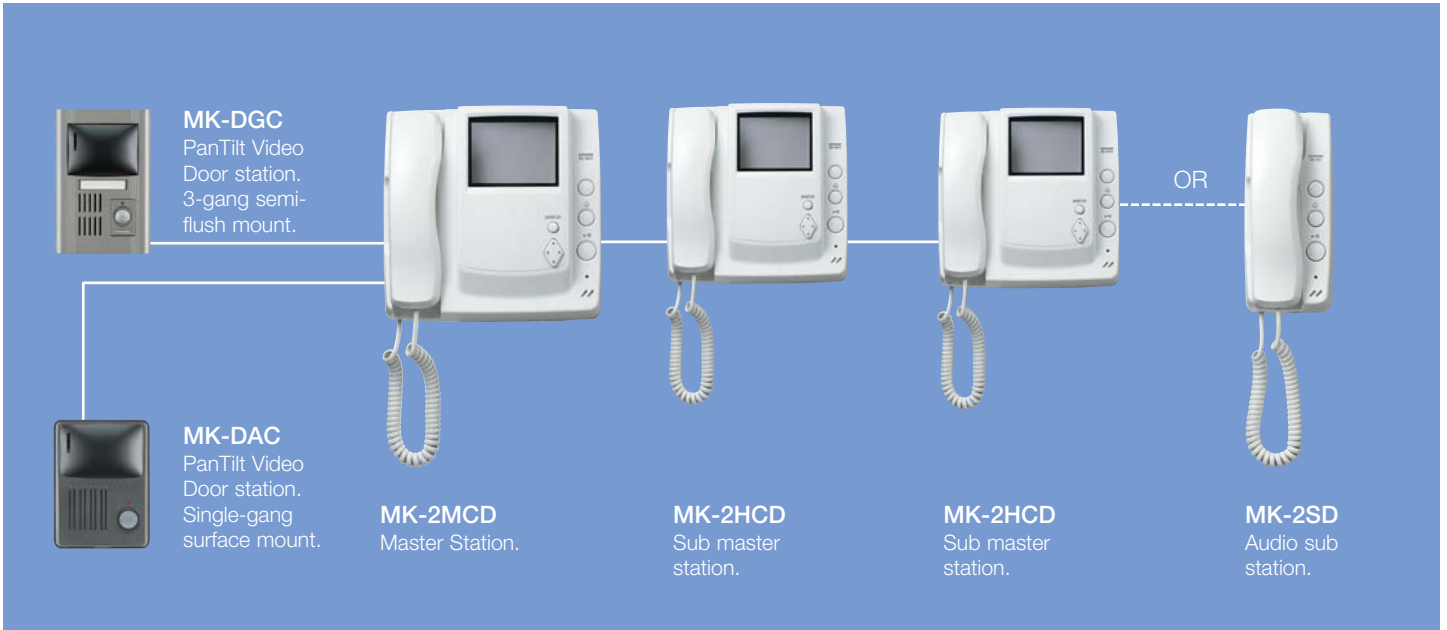

## Features

- Pan tilt door stations available.
- 2 doors to 3 rooms.
- Modern styling.
- Communication between monitors.
- Vandal resistant door stations available. (Not pan/tilt type)
- Simple wiring.
- Composite video output available (NTSC). (MKCABLE required)
- Audio door station available.

## Specifications

<b>Power Source</b>	DC 18V.
<b>Consumption</b>	MK-2MCD: (Max.) 750mA. MK-2HCD: (Max.) 450mA. MK-2SD: (Max.) 150mA.
<b>Power Supply</b>	PS182 2 Amp 18 Volts.
<b>Calling</b>	Chime, audio and image.
<b>Communication</b>	Simultaneous with handsets. All call voice calling, common talk.
<b>Door release</b>	AC 12V, 0.4A dry-closure contact.
<b>Wiring</b>	2 conductors to door. 4 conductors between room stations.
<b>Distance</b>	
Diameter	1 mm
Door to MK-2MCD	100 m
MK-2MCD to farthest sub	75 m
MK-2MCD to PS-182	10 m

## Additional Options



**MK-DH**  
Surface mount, video wide angle.



**EL-9S**  
Door release, AC12V, 0.35A.



**MK-2DA**  
Video 2 call door station.



**MK-D**  
Audio door station.



**IER-2**  
Call extension speaker.



**KC-32EU**  
Picture memory unit.



**RY-3DL**  
Multiple door release adaptor.

MKCABLE required.



**MKCABLE**  
Cable required for connection to RY3DL, the service switch and NTSC output.

Your local Aiphone reseller:

